

Appliances Listed For Use With B-Vent Appliances

Gas Vent Capacity For Deflecto's Easy-Liner® Chimney Liners

(Liners Derated 20% From B-Vent Tables)


| HEIGHT "H" | CONNECTOR "C" | EASY-LINER® COMMON VENT DIAMETER – "D" (INCHES) | | | | | | | | | | | | | | | | | |
|---------------|------------------|--|-------------|------------|-------------|-------------|------------|-------------|-------------|------------|-------------|-------------|------------|-------------|-------------|------------|-------------|-------------|------------|
| | | 4" | | | 5" | | | 5 1/2" | | | 6" | | | 7" | | | 8" | | |
| | | COMBINED APPLIANCE INPUT RATING IN THOUSANDS OF BTU PER HOUR | | | | | | | | | | | | | | | | | |
| | | FAN +fan | FAN +Nat | NAT Nat | FAN +fan | FAN +Nat | NAT Nat | FAN +fan | FAN +Nat | NAT Nat | FAN +fan | FAN +Nat | NAT Nat | FAN +fan | FAN +Nat | NAT Nat | FAN +fan | FAN +Nat | NAT Nat |
| 15' | DOUBLE | 100 | 90 | 73 | 156 | 131 | 115 | 190 | 156 | 139 | 227 | 182 | 165 | 342 | 282 | 224 | 445 | 355 | 292 |
| | SINGLES | 97 | 86 | 70 | 151 | 127 | 112 | 185 | 152 | 135 | 220 | 177 | 160 | 333 | 274 | 219 | 435 | 347 | 286 |
| 25' | DOUBLE | 116 | 104 | 88 | 184 | 157 | 138 | 225 | 185 | 165 | 270 | 221 | 198 | 409 | 341 | 268 | 537 | 434 | 350 |
| | SINGLE | 111 | 100 | 84 | 178 | 152 | 134 | 220 | 180 | 162 | 262 | 214 | 192 | 398 | 332 | 261 | 524 | 423 | 342 |
| 30' | DOUBLE | 122 | 110 | 94 | 195 | 168 | 148 | 240 | 200 | 180 | 289 | 238 | 213 | 438 | 367 | 288 | 576 | 468 | 376 |
| | SINGLE | 116 | 106 | 90 | 189 | 162 | 143 | 233 | 195 | 175 | 280 | 229 | 206 | 426 | 357 | 279 | 562 | 456 | 367 |
| 35' | DOUBLE | 125 | 113 | 98 | 202 | 175 | 154 | 250 | 210 | 186 | 301 | 249 | 222 | 457 | 385 | 300 | 603 | 492 | 392 |
| | SINGLE | 119 | 109 | 93 | 195 | 168 | 148 | 242 | 202 | 180 | 291 | 239 | 214 | 444 | 374 | 291 | 588 | 479 | 382 |
| 45' | DOUBLE | 151 | 119 | 104 | 216 | 189 | 166 | 270 | 230 | 200 | 325 | 271 | 240 | 494 | 420 | 326 | 656 | 541 | 424 |
| | SINGLE | 125 | 114 | 99 | 208 | 180 | 158 | 260 | 218 | 194 | 314 | 260 | 229 | 480 | 407 | 316 | 640 | 426 | 413 |

* NOT RECOMMENDED

GENERAL VENTING REQUIREMENTS

- 1) The sizing charts are a guide **ONLY** for the most common of (fan) furnace and/or furnace (fan) plus hot water heater (+NAT) combinations.
- 2) All of the specifications are in accordance with the International Fuel Gas Code (2003) Part VI.
- 3) These charts are not intended to replace the actual sizing calculations, but **ONLY** as a guideline. Local authorities may over rule the foregoing charts and their specifications.
- 4) It is very important that sufficient air, for combustion and ventilation, is provided to room containing the appliance(s) to enable correct and efficient working of the appliance(s) and the chimney.
- 5) **Easy-Liner®** systems are UL/CUL Listed for existing masonry or factory built chimneys and vents serving Category "I" natural gas or propane fired appliances.
- 6) See our "Instruction and Installation Manual" for more information.
- 7) The use of a "Y" fitting rather than a "T" fitting is recommended when common venting into a manifold system.

TWO APPLIANCES

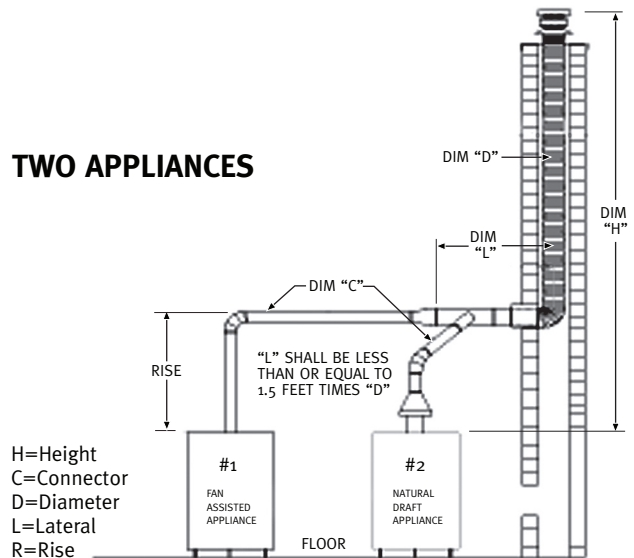

09/07

©2007
DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com
DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.

LK425tps-c