



ACWD - Starter Collar with Damper - Galvanized

used to connect main HVAC duct line

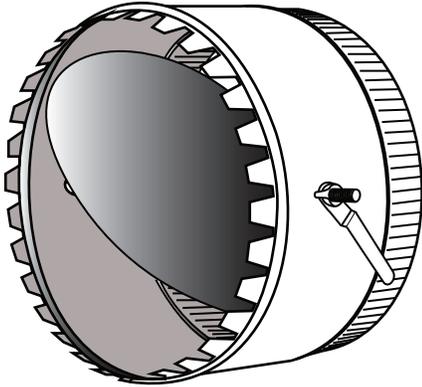

Code	Description
ACWD0430	Galv.Starter Collar with damper & handle,fishlock & crimp,4"dia x 5"x 30ga
ACWD0530	Galv.Starter Collar with damper & handle,fishlock & crimp,5"dia x 5"x 30ga
ACWD0630	Galv.Starter Collar with damper & handle,fishlock & crimp,6"dia x 5"x 30ga
ACWD0730	Galv.Starter Collar with damper & handle,fishlock & crimp,7"dia x 5"x 30ga
ACWD0830	Galv.Starter Collar with damper & handle,fishlock & crimp,8"dia x 5"x 30ga
ACWD1028	Galv.Starter Collar with damper & handle,fishlock & crimp,10"dia x 5"x28ga
ACWD1228	Galv.Starter Collar with damper & handle,fishlock & crimp,12"dia x 5"x28ga
ACWD1428	Galv.Starter Collar with damper & handle,fishlock & crimp,14"dia x 5"x28ga

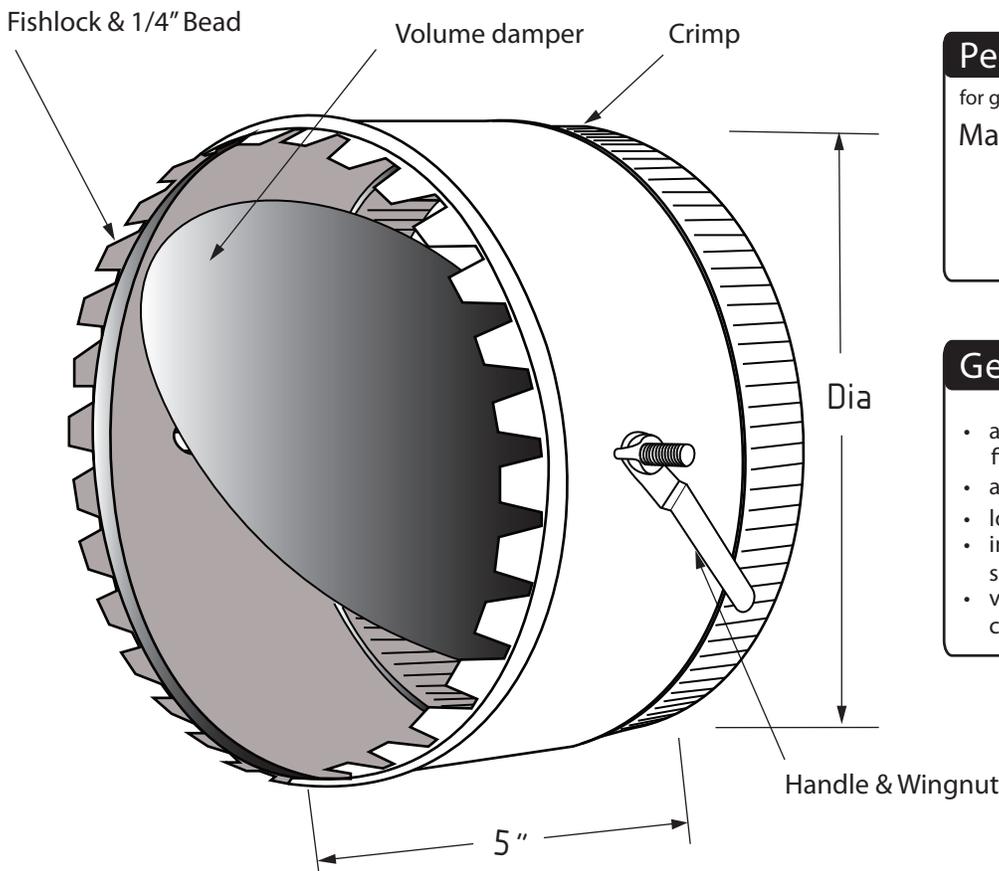

Performance Data

for galvanized HVAC collar

Material

- all galvanized 30 & 28ga
- c/w galvanized handle & 2 wingnuts
- included volume damper

General Information

- allows flex duct connection to fishlock and bead
- allows for fine air flow adjustments
- lock-in air flow adjustment using wingnuts
- industry standard fishlock assures for a secure connection to duct work
- volume damper assembly is located in the centre of the tube