


## Technical Product Specification

All Metal Dryer Connector, Aluminum  
3" (7.6 cm) & 4" (10.2 cm)



AM, MAC

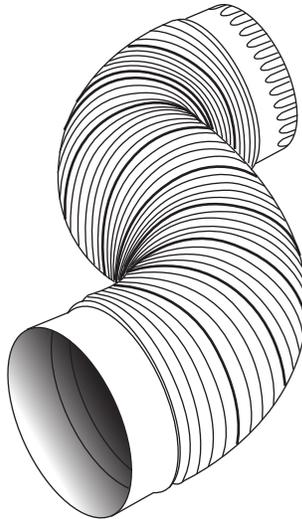

Model	Description
AM32	3" x 24" duct with male/female collar
AM41	4" x 12" duct with male/female collar
AM42	4" x 24" duct with male/female collar
MAC36024	4" x 24" duct with male/female collar
AM46	4" x 72" duct with male/female collar
AM48	4" x 96" duct with male/female collar

### Performance Data

#### MAXIMUM VELOCITY

- 5000 FPM / 25m/sec

#### MAXIMUM RATED PRESSURES

- 3" - 4" dia., 6"W.C/ 1.5 Kpa  
Pos/Neg

#### OPERATING TEMPERATURE RANGE

- -100F to 430F/-73C to 221C  
Intermittent





#### FLAME SPREAD/SMOKE

#### DEVELOPED


- 0/0

### General Information

- Extends from 12" to 96"  
(30 cm to 2.4 m)
- Flexes in any direction for easy installation
- Connecting collars with smooth edge for safety
- Semi-rigid aluminum

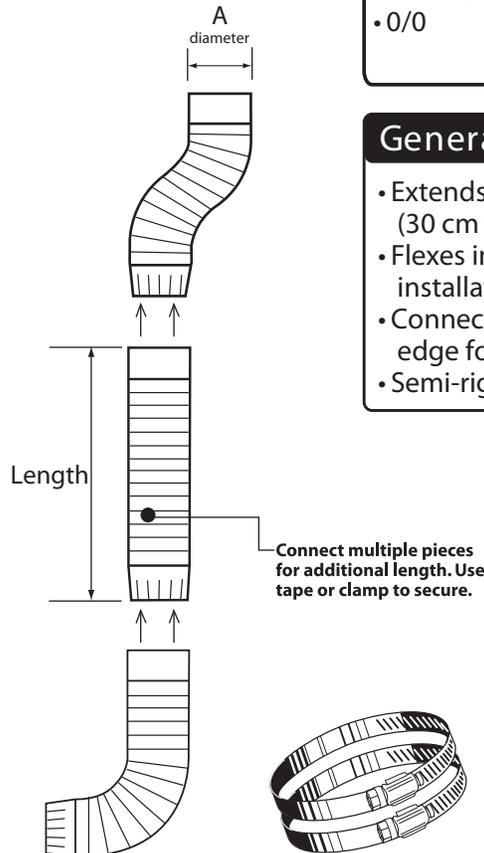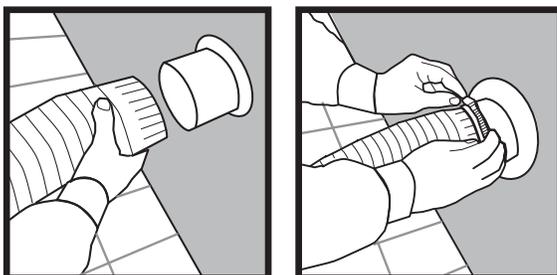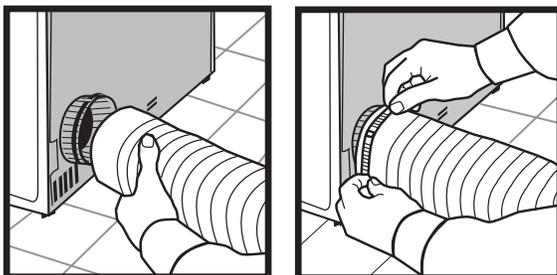

Model	A	Length
AM32	3"	24" (60.9cm)
AM41	4"	12" (30cm)
AM42	4"	24" (60.9cm)
MAC36024	4"	24" (60.9cm)
AM46	4"	72" (1.8m)
AM48	4"	96" (2.4m)



Metal worm drive clamps  
(sold separately)