


### DTT - Double Top Take-off, Galvanized

Model No.	Description
DT05	Galvanized double top take-off, round to rectangular transition, 5" dia.
DT06	Galvanized double top take-off, round to rectangular transition, 6" dia.

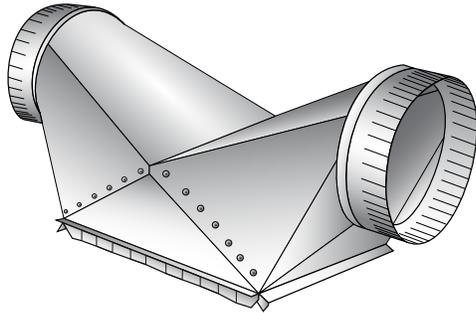

DTT

#### Performance Data

- for galvanized duct fitting

#### Material

- galvanized sheet metal (standard)

#### Construction


- dimple lock

#### Operating Temperature Range

- -100°F to 430°F / -73°C to 221°C

#### General Information


- Connecting collars with smooth edge for safety
- Allows Fitting to be mounted to Rectangular duct
- Saves space when connecting to duct work
- Improves air flow

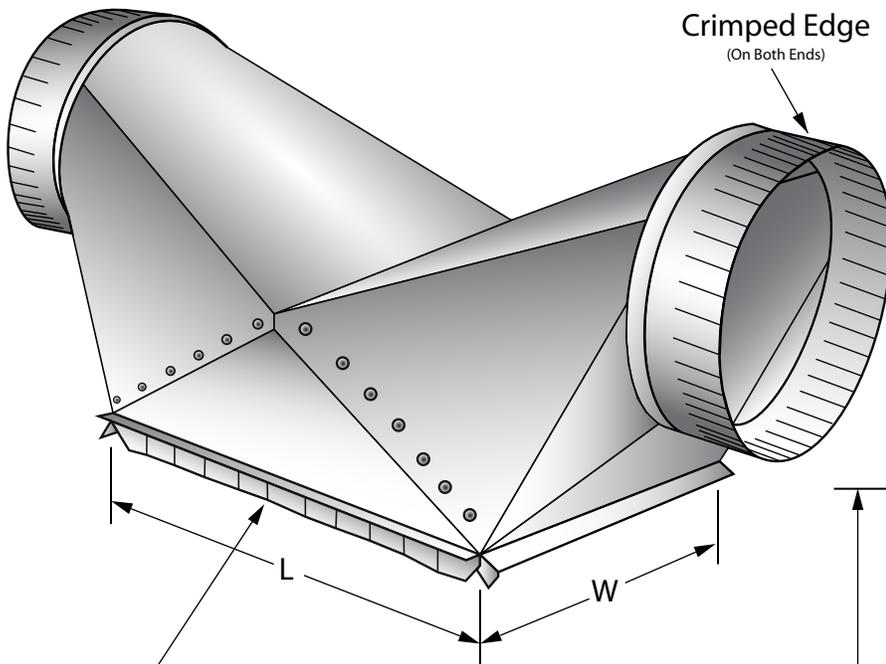

Double Top Take-off

Fishlock Flange on all sides

Model No.	Description	L x W x H
DT05	5" diameter	9 1/2" x 8" x 7 1/2"
DT06	6" diameter	10 1/2" x 8 1/2" x 8"

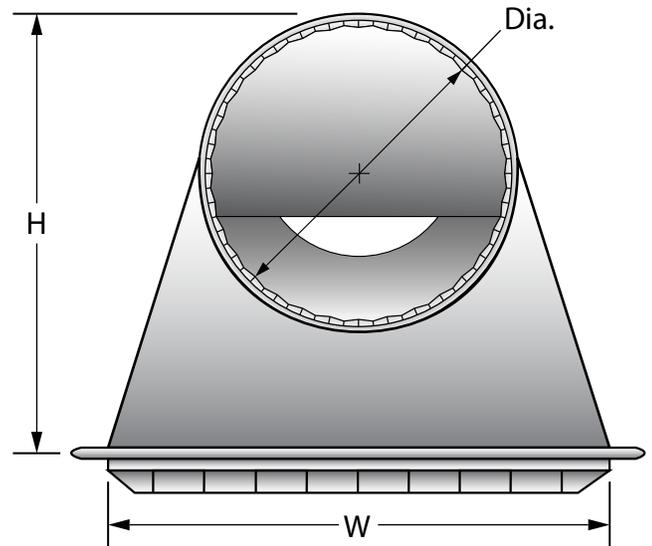

End View