

Supurr-Flex® pure aluminum, multi-layered flexible metallic duct, C-UL-US Class 1 Air Connector



FUL Duct

Model No.	Description
FUL0220	UL Listed, multi-layered flexible duct
FUL0325	UL Listed, multi-layered flexible duct
FUL0425	UL Listed, multi-layered flexible duct
FUL0525	UL Listed, multi-layered flexible duct
FUL0625	UL Listed, multi-layered flexible duct

Performance Data

for uninsulated aluminum, multi-layered flexible metallic duct

Maximum Velocity

- 5000 FPM / 25m/sec

Maximum Rated Pressures

- all diameters 10" W.C / 2.5 Kpa Pos.
- 2"-6"dia. : .5" W.C / .12 Kpa Neg.

Operating Temperature Range

- 0°F - 265°F, -18 C - 130 C I ntermittent

"FUL"

- C-UL-US Class 1 Air Connector


Flame Spread

- Flame spread....under 25ft (7.7m)
- Smoke Developed....under 50

General Information

- available in diameters 2" (5.1cm) to 6" (15.2cm) and lengths up to 25' (7.6m)
- 25 ft (7.6m) compresses to 15" (38cm)
- class 1 flexible air connectors shall be limited to installation lengths of 14' (4.2m) UL181 and ULC S110 Standards
- best non-insulated ventilation duct made
- ideal for bathroom fan exhaust, fresh air intake and non-insulated ventilation duct

Pressure Loss Diagram

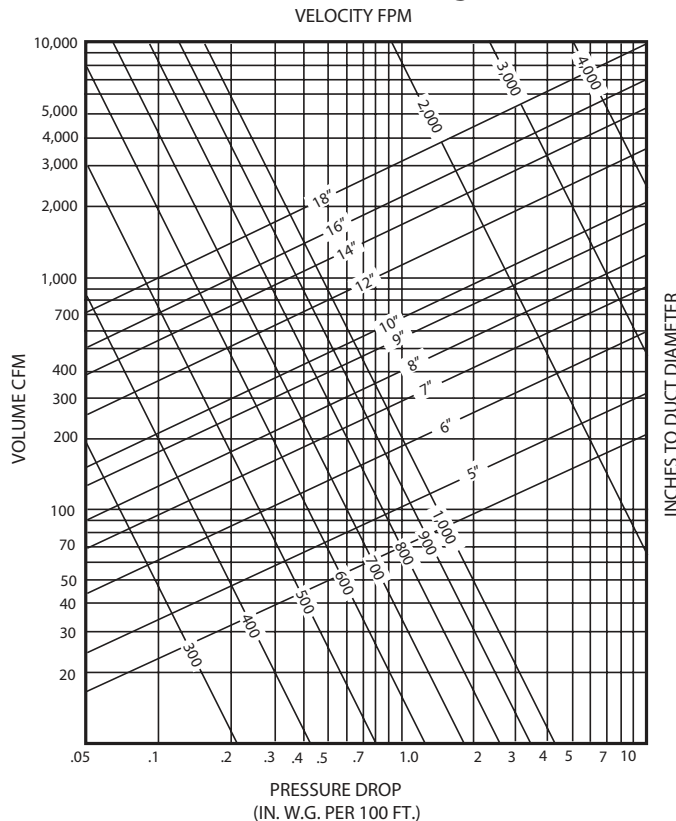

Model No.	A	length
FUL0220	2"dia.	20 ft (6.1m)
FUL0325	3"dia.	25 ft (7.6m)
FUL0425	4"dia.	25 ft.
FUL0525	5"dia.	25 ft.
FUL0625	6"dia.	25 ft.