


IDR6 - Insulated Duct - Flexible duct wrapped in R6 insulation and black polyethylene cover - UL Listed 181 Class 1 Air Duct

Model No.	Description
ID0625R6	6" x 25' insulated duct
ID0825R6	8" x 25' insulated duct
<i>additional sizes available – call for more information</i>	

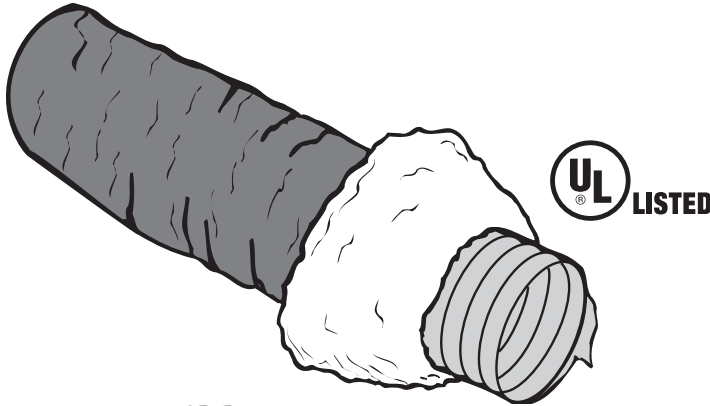

IDR6

Performance Data

for insulated flexible duct

Maximum Velocity

- 5000FPM (25m/sec)

Maximum Related Pressures


- All diameters 10" W.C. (2.5 Kpa Pos.)
- All diameters .5" W.C. (.12 Kpa Neg.)

Operating Temperature Range

- 0 °F to 266 °F (-18 C to 130 C Intermittent)

Flame Spread

- Flame Spread . . . under 25 ft(7.6m)
- Smoke Developed . . . under 50

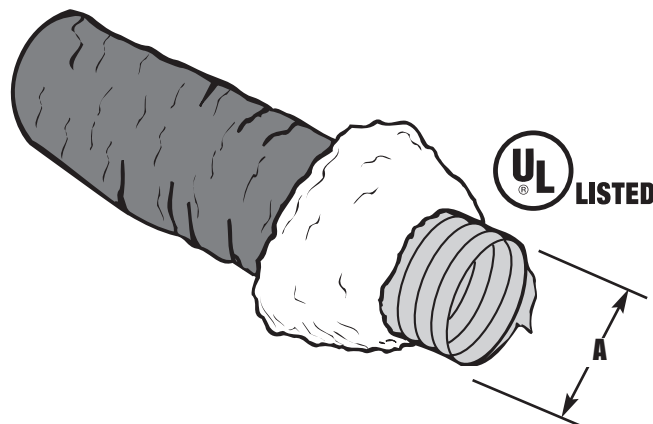

Thermal Performance

General Information

- ideal for long run applications of HVAC in accordance with local building codes
- 25ft. (7.6m) compresses to 30" (76cm)
- flexible steel wire helix
- polyester film with approved bonding agent
- no installation length limitation
- Thermal certification with ADC standard
- Flame / Smoke Ratings : 25/50

Model No.	A	length
ID0625R6	6" dia. (15.2cm)	25ft (7.6m)
ID0825R6	8" dia. (20.3cm)	25ft (7.6m)