


Easyliner® Fireplace Liner - for relining masonry chimneys
for natural gas log fireplaces
UL Listed and CUL Listed

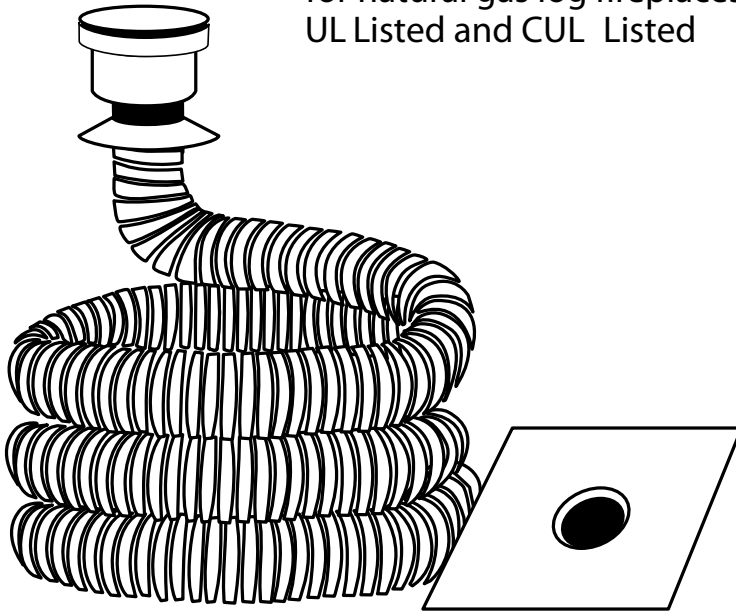

Easyliner® Fireplace Liner Kit

Model No.	Description
LKFP325	3"x25' Easyliner® Fireplace Liner Kit
LKFP335	3"x35' Easyliner® Fireplace Liner Kit
LKFP425	4"x25' Easyliner® Fireplace Liner Kit
LKFP435	4"x35' Easyliner® Fireplace Liner Kit

Performance Data

for Easyliner® Fireplace Liner Kits

Maximum Temperature Usage


- 245°C / 470°F

Material Type

- alloy 3003 corrosion resistant aluminum, 2 ply
- thickness - 0.010"(.25mm)
- UL (1777) and ULC (S635-M90) listed

General Information

- flexible aluminum liner duct
- one piece rain cap with storm collar
- full aluminum flashing with built-in water dam
- installation manual / warranty card

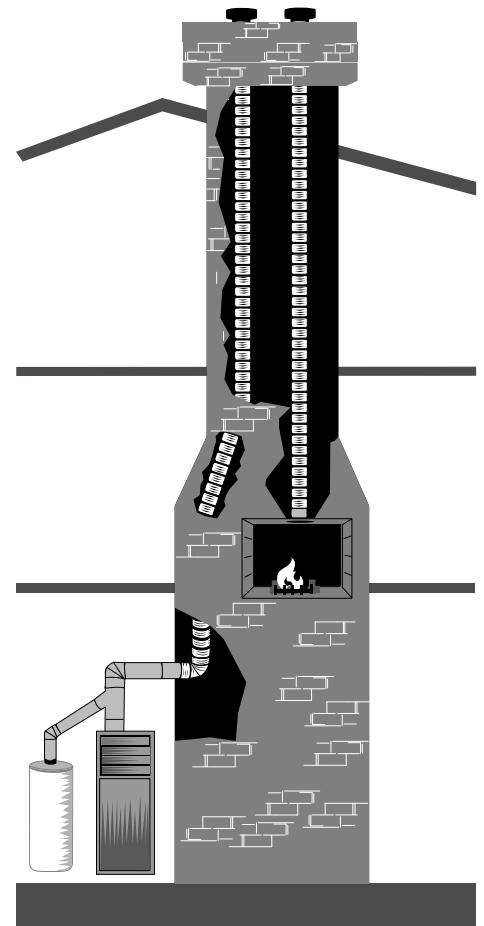

typical application

