


Insulated Duct - PDPI- Flexible duct wrapped with R4.2 insulation and black polyethylene cover - C-UL- US Listed Class 1 Air Connector

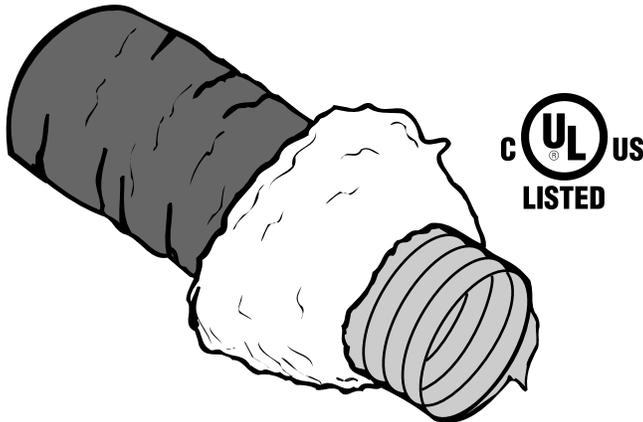

PDPI

Model No.	Description
PDPI0325	3"x 25' insulated duct
PDPI0425	4"x 25' insulated duct
PDPI0525	5"x 25' insulated duct
PDPI0625	6"x 25' insulated duct
PDPI0725	7"x 25' insulated duct
PDPI0825	8"x 25' insulated duct
PDPI1025	10" x 25' insulated duct
PDPI1225	12" x 25' insulated duct

Performance Data

for insulated flexible duct

Maximum Velocity

- 5000FPM/25m/sec

Maximum Rated Pressures

- All diameters 10" W.C / 2.5 Kpa Pos.
- All diameters .5" W.C / .12 Kpa Neg.


Operating Temperature Range

- -18°C - +130°C, 0 F - 265 F Intermittent

Flame Spread

- Flame Spread . . . under 25 ft(7.6m)
- Smoke Developed . . . under 50

Model No.	A	length
PDPI0325	3" dia.	25ft(7.6m)
PDPI0425	4" dia.	25f t
PDPI0525	5" dia.	25f t
PDPI0625	6" dia.	25f t
PDPI0725	7" dia.	25f t
PDPI0825	8" dia.	25f t
PDPI1025	10" d ia.	25ft
PDPI1225	12" d ia.	25ft

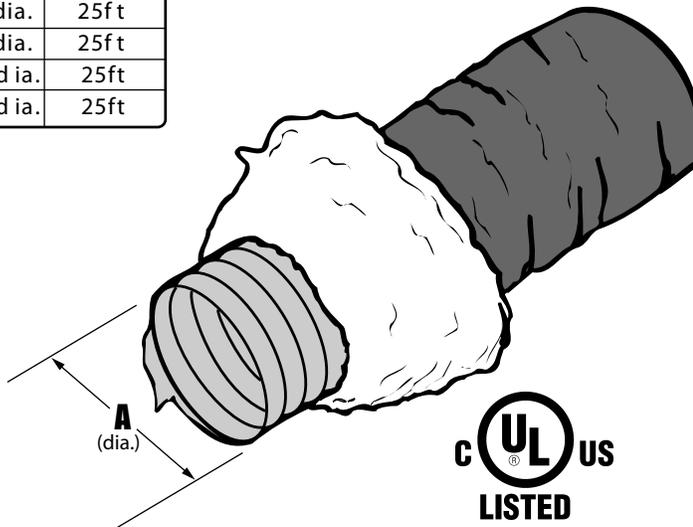

General Information

- available from 3"(7.5cm) to 16"(40.6cm)
- ideal for applications of HVAC, in accordance with local building codes.
- 25ft(7.6m) compresses to 30"(76cm)
- flexible galvanized steel wire helix
- polyester film with bonding agent
- 14 Ft(4.2 M) Installation length limitation
- Thermal Certification with ADC Standard



Thermal Performance