


SD - Insulated Duct - Flexible duct wrapped with R4.2 insulation and silver metalized jacket - UL Listed 181 Class 1 Air Duct

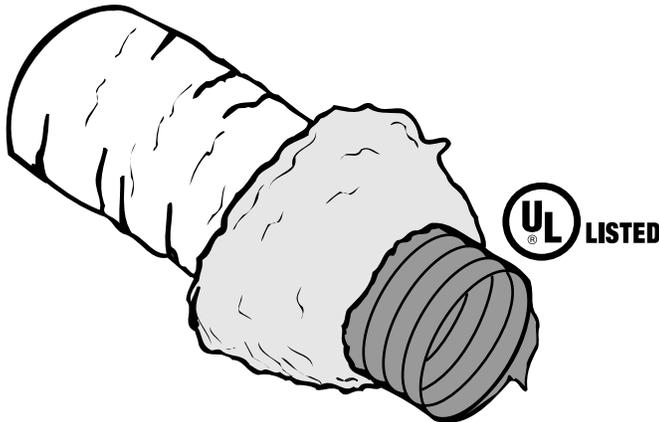

SD

Model No.	Description
SD0425	4" x 25' insulated duct
SD0525	5" x 25' insulated duct
SD0625	6" x 25' insulated duct
SD0725	7" x 25' insulated duct
SD0825	8" x 25' insulated duct
SD1025	10" x 25' insulated duct
SD1225	12" x 25' insulated duct

additional sizes available – call for more information

Performance Data

for insulated flexible duct

Maximum Velocity

- 5000FPM / 25m/sec


Maximum Rated Pressures

- All diameters 10" W.C / 2.5 Kpa Pos.
- All diameters .5" W.C / .12 Kpa Neg.

Operating Temperature Range

- -18°C - 130°C / 0 F to 266 F Intermittent

Model No.	A	length
SD0425	4" dia.	25ft(7.6m)
SD0525	5" dia.	25ft
SD0625	6" dia.	25ft
SD0725	7" dia.	25ft
SD0825	8" dia.	25ft
SD1025	10" dia.	25ft
SD1225	12" dia.	25ft

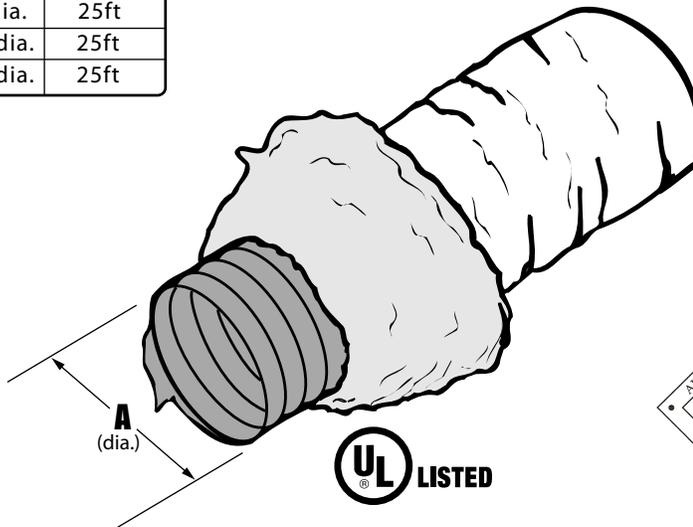

General Information

- ideal for long run applications of HVAC in accordance with local building codes
- 25ft. (7.6m) compresses to 30" (76cm)
- flexible steel wire helix
- polyester film with approved bonding agent
- no installation length limitation
- Thermal certification with ADC standard
- Flame / Smoke Ratings : 25/50



Thermal Performance